


Design & Manufacturing:			Performance Specification		
Face to Face:			Nominal Pressure	PN25	Test Medium
Connection Dimensions:			Shell Test	3.75	#/Water
Test:			Seal Test	2.75	
			Back Seal Test	2.75	
Suitable Temperature	-29~425°C		Air Seal Test	0.6	#/Air
Suitable Media	水, 气, W.O.G				

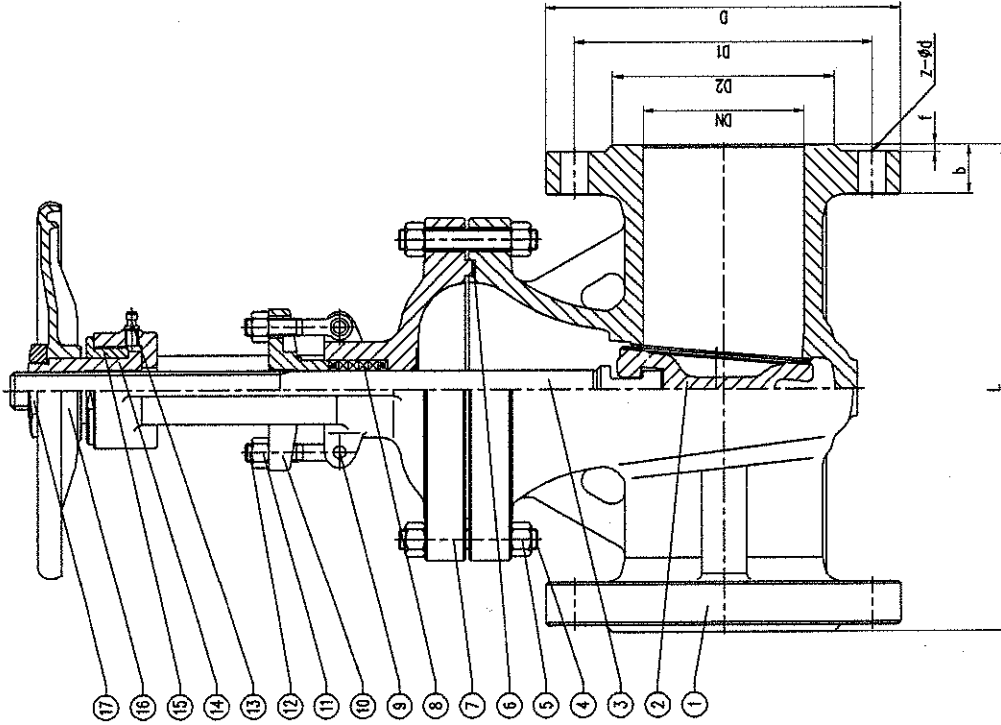

300	500	485	430	390	4	40	16-φ30
250	450	425	370	335	3	36	12-φ30
200	400	360	310	278	3	34	12-φ26
150	350	300	250	212	3	30	8-φ26
100	300	230	190	158	3	24	8-φ22
80	280	195	160	133	3	22	8-φ18
50	250	160	125	102	3	20	4-φ18
DN	L	D	D1	D2	f	b	z-φd

11	#/Nuts	ASTM A194 2H			
10	#/Packing Gland	ASTM A216 WCB			
9	#/Pin	ASTM A29 1045			
8	#/Packing	Flexible Graphite			
7	#/Bonnet	ASTM A216 WCB			
6	#/Gasket	SS+ #/Graphite	17	#/Nut	ASTM A29 1035
5	#/Nuts	ASTM A194 2H	16	#/Handwheel	ASTM A47 32510
4	#/Bolts	ASTM A193 B7	15	#/Cover	ASTM A29 1035
3	#/Stem	ASTM A182 F6a	14	#/Stem Nut	Brass
2	#/Wedge	ASTM A216 WCB+13Cr	13	#/Cup	#/Unit
1	#/Body	ASTM A216 WCB+13Cr	12	#/Eye Bolts	ASTM A193 B7
#/No.	#/Name	#/Material	#/No.	#/Name	#/Material
客户/Client:					
合同/Contract:					
DN/PS:DN50-300			产品名称/Product name: 闸阀/Gate Valve		
数量/Quantity:			压力等级/Class: PN25		
重量/Weight:			型号/Type: Z41H-25C		
日期/Date: 2023.10.23			总装图/Assemble Drawing		

Signature

25.10.2023