
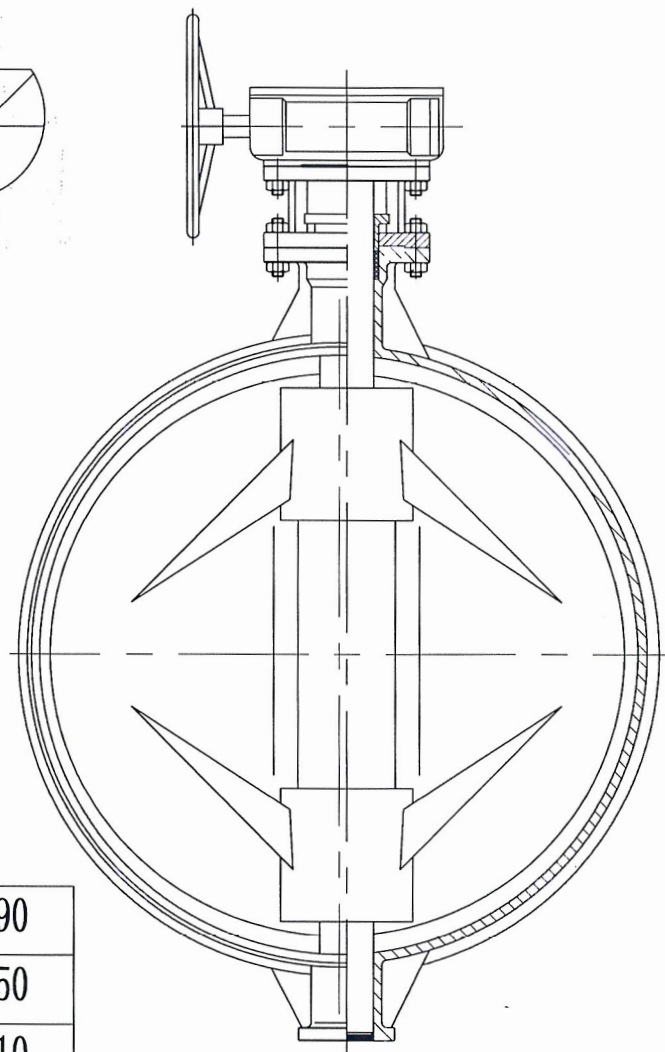



DS363H-25C

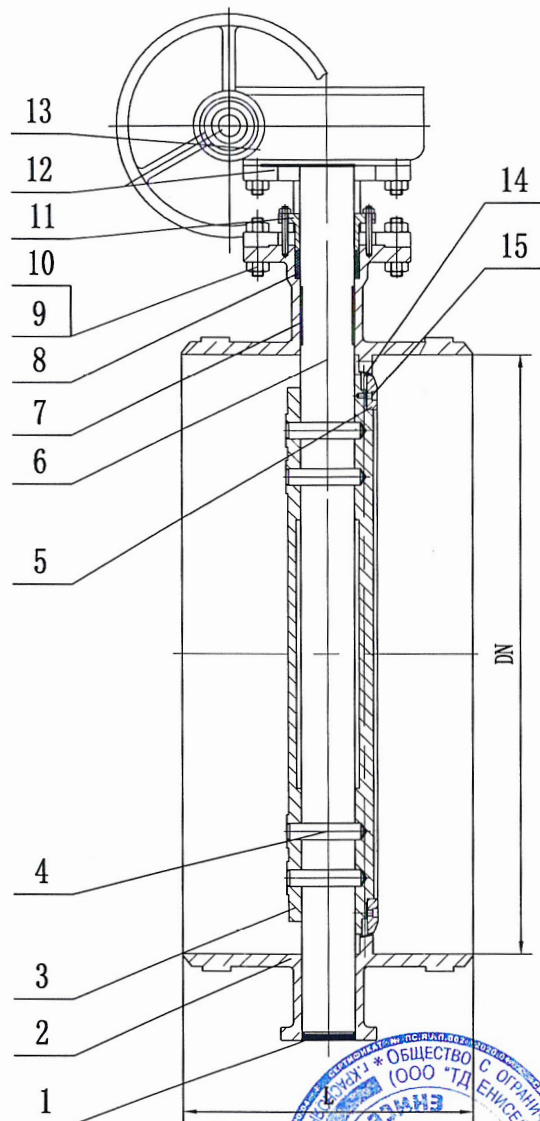

TECHNICAL SPECIFICATION

Nominal Pressure		PN 25	
TEST PRESSURE	SHELL TEST	3.75	MPa
	BACKSEALING TEST		
	Positive sealing test (water)	2.75	
	Reverse sealing test (water)	2.0	
APPLICABLE TEMP.: -29~350℃			
APPLICABLE MEDIUM:W.O.G			

Technical Requirements

1. Design and manufacture JB/T 8527
2. Flanges: GB/T 12224
3. Face to face: GB/T 12221
4. Inspection and test GB/T 13927

No.	Name	Material
1	Lower Cover	Q235A
2	Body	WCB
3	Disc	CF8
4	Pin	2Cr13
5	Platen	304
6	Stem	2Cr13
7	Bearing	SF-1
8	Packing	Graphite
9	Bolt	35#
10	Nut	25#
11	Gland	WCB
12	Yoke	WCB
13	Gear shaft	Assembly
14	Seat	304+Graphite
15	Screw	304

600	390
500	350
400	310
300	270
250	250
200	230
DN	L

Sample diagram

YUANDA VALVE GROUP., LTD

Butterfly Valve

DS363H-25C

标记处数	更改文件号	签字	日期				
设计		标准化		图样标记	重量	比例	
审核						1:15	
工艺		日期		共	页	第	页

