


YS-EZ-300



|                      |               |
|----------------------|---------------|
| Nominal pressure PN  | 16            |
| Strength pressure PS | 2.4           |
| Enclose pressure PM  | 1.76          |
| Suitable temperature | 200 °C        |
| testing pressure P42 | 0.9           |
| Suitable medium      | Water, Vapour |

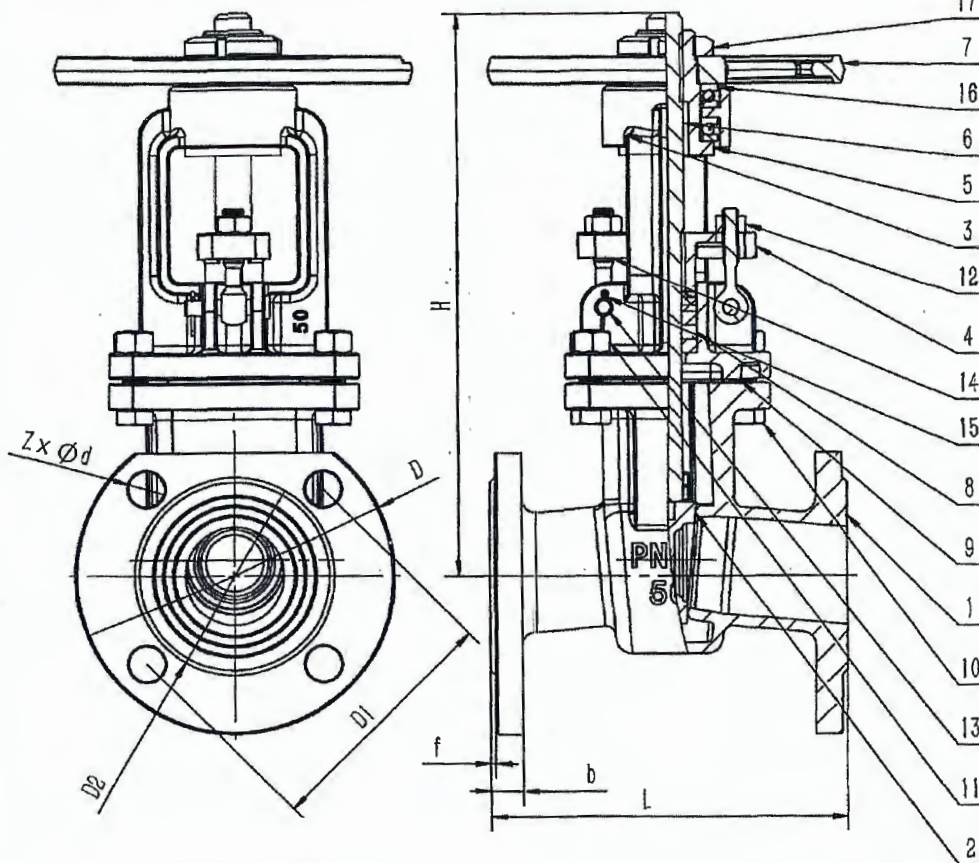

|     |                |               |                   |     |               |
|-----|----------------|---------------|-------------------|-----|---------------|
| 17  | GB/T 812-1988  | Round nut     | 35                | 1   | standard part |
| 16  | GB/T 301-1995  | Bearing       | Bearing steel     | 2   | standard part |
| 15  | GB/T 6170-2000 | Nut           | 25                | 2   | standard part |
| 14  | GB/T 91-2000   | Cotter pin    | A3                | 2   | standard part |
| 13  | GB/T 798-1988  | Live bole     | 35                | 2   | standard part |
| 12  | GB/T 882-2008  | Pin shaft     | 35                | 2   | standard part |
| 11  | GB/T 6170-2000 | Nut           | 25                | 4   | standard part |
| 10  | GB/T5783-200   | Bolt          | 35                | 4   | standard part |
| 9   | YS-EZ-09       | Shim          | Flexible graphite | 1   |               |
| 8   | YS-EZ-08       | Filler        | Flexible graphite | 5   |               |
| 7   | YS-EZ-07       | Handwheel     | WCB               | 1   |               |
| 6   | YS-EZ-06       | Stem          | 2Cr13             | 1   |               |
| 5   | YS-EZ-05       | Yoke          | Brass             | 1   |               |
| 4   | YS-EZ-04       | Packing gland | WCB               | 1   |               |
| 3   | YS-EZ-03       | Bonnet        | WCB               | 1   |               |
| 2   | YS-EZ-02       | Disc          | WCB+13Cr          | 1   |               |
| 1   | YS-EZ-01       | Valve body    | WCB+13Cr          | 1   |               |
| No. | Code           | Name          | Material          | Qty | Remarks       |

| DN    | L   | D   | D1  | D2  | b-f  | Z x Ød   | H   | H1   | Weight | Hand wheel |
|-------|-----|-----|-----|-----|------|----------|-----|------|--------|------------|
| DN50  | 180 | 160 | 125 | 102 | 16-2 | 4 x Ø18  | 285 | 340  | 12     | Φ180       |
| DN80  | 210 | 195 | 160 | 133 | 18-2 | 4 x Ø18  | 325 | 409  | 19     | Φ210       |
| DN100 | 230 | 215 | 180 | 158 | 20-2 | 8 x Ø18  | 390 | 489  | 26     | Φ230       |
| DN125 | 255 | 245 | 210 | 185 | 22-3 | 8 x Ø18  | 451 | 576  | 35     | Φ230       |
| DN150 | 280 | 280 | 240 | 212 | 24-3 | 8 x Ø22  | 513 | 657  | 47     | Φ280       |
| DN200 | 330 | 335 | 295 | 268 | 26-3 | 12 x Ø22 | 636 | 829  | 70     | Φ310       |
| DN250 | 430 | 405 | 355 | 320 | 27-3 | 12 x Ø26 | 739 | 972  | 108    | Φ364       |
| DN300 | 500 | 460 | 410 | 370 | 27-3 | 12 x Ø26 | 854 | 1119 | 150    | Φ396       |

|            |        |           |                   |           |      |
|------------|--------|-----------|-------------------|-----------|------|
| Sign       | number | Partition | Change the number | Autograph | Date |
| Design     |        |           | Standard          |           |      |
| Check      |        |           | Technology        |           |      |
| To examine |        |           | Approval          |           |      |

|                     |        |              |
|---------------------|--------|--------------|
| Gate valve          |        |              |
| DN50-DN300          |        |              |
| Z41H-16c Py16       |        |              |
| Stage marker        | Weight | Proportion   |
| S                   | A      | D            |
| A total of 1 pieces |        | Edition A1.0 |

Hebei Yaosheng IM & EX Trading Co.,Ltd  
Z41H-16c Py16 DN 50-300

Part number

Borrower

Old map number

Base number

Autograph

Date

| Performance Specification |                 |         |     |
|---------------------------|-----------------|---------|-----|
| Nominal pressure          |                 | 1.6     | MPa |
| Text pressure             | Strength test   | 2.4     |     |
|                           | Sealing test    | 1.76    |     |
|                           | Upper seal test |         |     |
|                           | Air seal test   | 0.6     |     |
| Applicable temperature    |                 | -29-200 | °C  |
| Applicable media          |                 | Water   |     |

Hebei Yaosheng IM & EX

Trading Co., Ltd

Z4IH-16c Py16 DN 350-400

|     |  |           |  |
|-----|--|-----------|--|
| 1   |  | Body      |  |
| NO. |  | Part Name |  |

| 图样标记 | 数量 | 材料 | 比例 |
|------|----|----|----|
|      |    |    |    |
| 共    | 页  | 第  | 页  |