
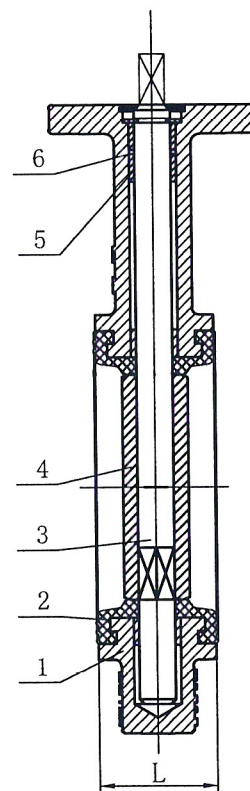



SB371R-16C DN100-150

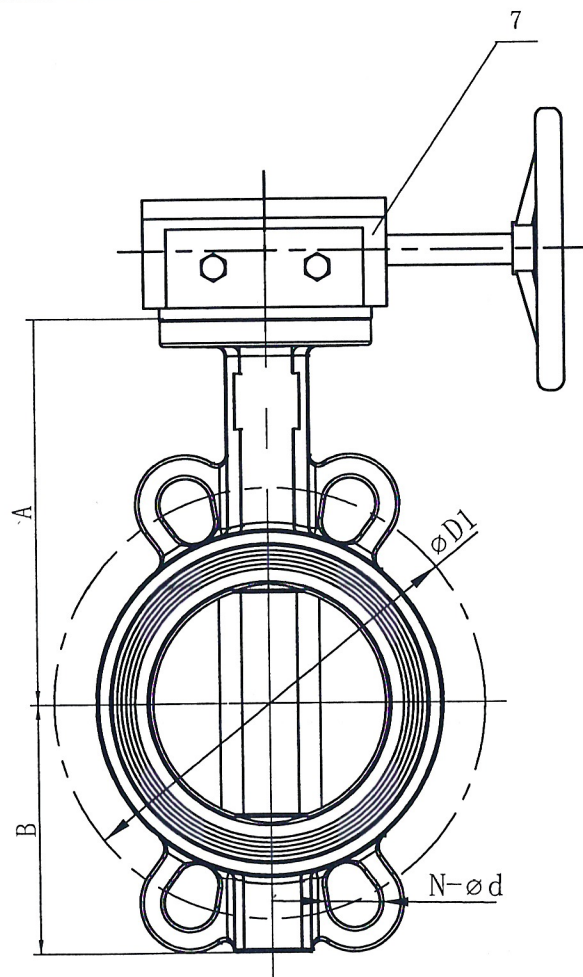

DN (mm)	100-150	
PN(mpa)	1.6	
Working temp.	-10~100 °C	
Working medium	Water, air, gas etc.	
Pressure test	Sealling	1.76
	Strength	2.4

TECHNICAL STANDARDS

1. Design and manufacturing standard: API 609;
2. End standard: EN 1092-1;
3. Face to face standard: API 609;
4. Inspection and testing standard: API 598.



Хаснов А.Б.
25.04.2015
Мамонтов

150	56	197	138	240	8-22	F07	90	70	4-10
100	52	169	109	180	8-18	F07	90	70	4-10
DN	L	A	B	øD1	N-ød	top flange	øE	øF	n-ød1
ISO5211									

07	Worm gear		DI
06	O ring		EPDM
05	Bushing		Polymer
04	Disc		CF8
03	Stem		SS410
02	Seat		EPDM
01	Body		WCB
NO.	DETAILS	QTY	MATERIAL

SEALLON
 No limits for quality

Seallon Flow Technology

Wafer Butterfly Valve

SB371R-16C

Drawing mark Weight Scale

Total page The page