


3C2-H14Z



250	450	425	370	335	3	36	12- ϕ 30
200	400	360	310	278	3	34	12- ϕ 26
150	350	300	250	212	3	30	8- ϕ 26
DN	L	D	D1	D2	f	b	Z- ϕ d

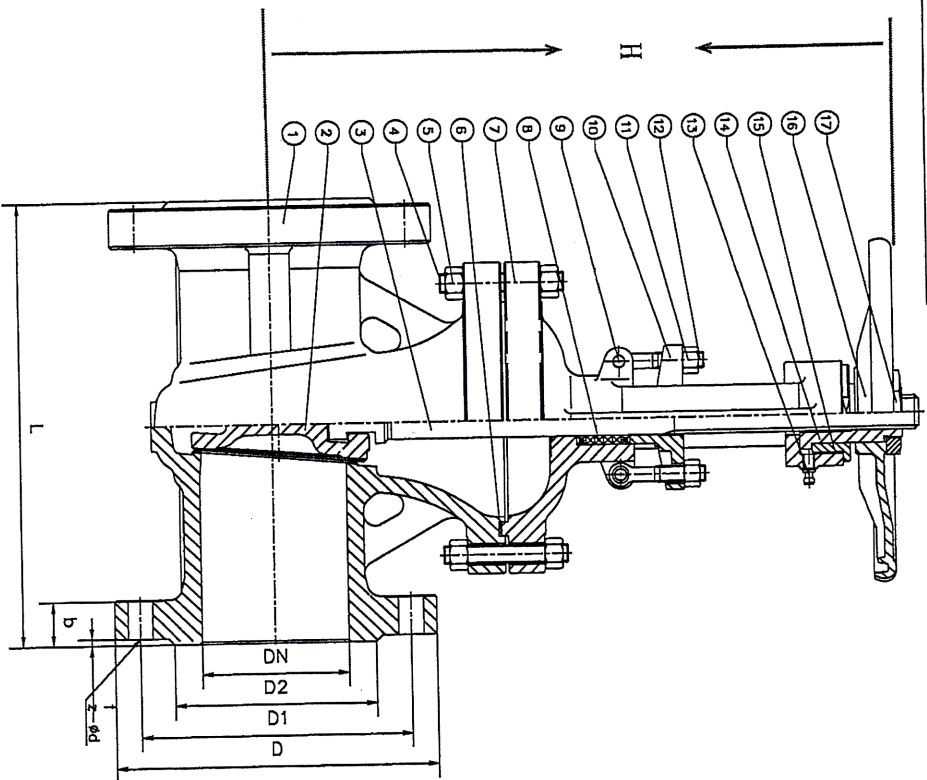

Итого 2402-2844

05.03.24

性能规范表			
公称压力		2.5	MPa
强度试验		3.75	
密封试验		2.75	
上密封试验		—	℃
气密封试验		0.6	
适用温度		-29~300	
适用介质		水、蒸汽、油品等	

17	螺母/Nut	A29 1035	
16	手轮/Handwheel	QT350	
15	轴套/Shaft	A29 1035	
14	轴套/Shaft	Brass	
13	轴套/Shaft	轴套/Shaft	
12	轴套/Shaft	C.S	
11	轴套/Shaft	C.S	
10	轴套/Shaft	16MN	
9	轴套/Shaft	SS	
8	轴套/Shaft	轴套/Shaft	
7	轴套/Shaft	16MN	
6	轴套/Shaft	SS+石墨/Graphite	
5	轴套/Shaft	C.S	
4	轴套/Shaft	C.S	
3	轴套/Shaft	14X17H2	
2	轴套/Shaft	16MN+07Z25H13	
1	轴套/Shaft	16MN+07Z25H13	

客户/Client:		产品名称/Product name: 闸阀/Gate Valve		压力等级/Class: PN25
合同/Contract:		数量/Quantity:		型号/Type: Z41H-25C
重量/Weight:		日期/Date: 2023.11.27		总装图/Assemble Drawing