


GR240423

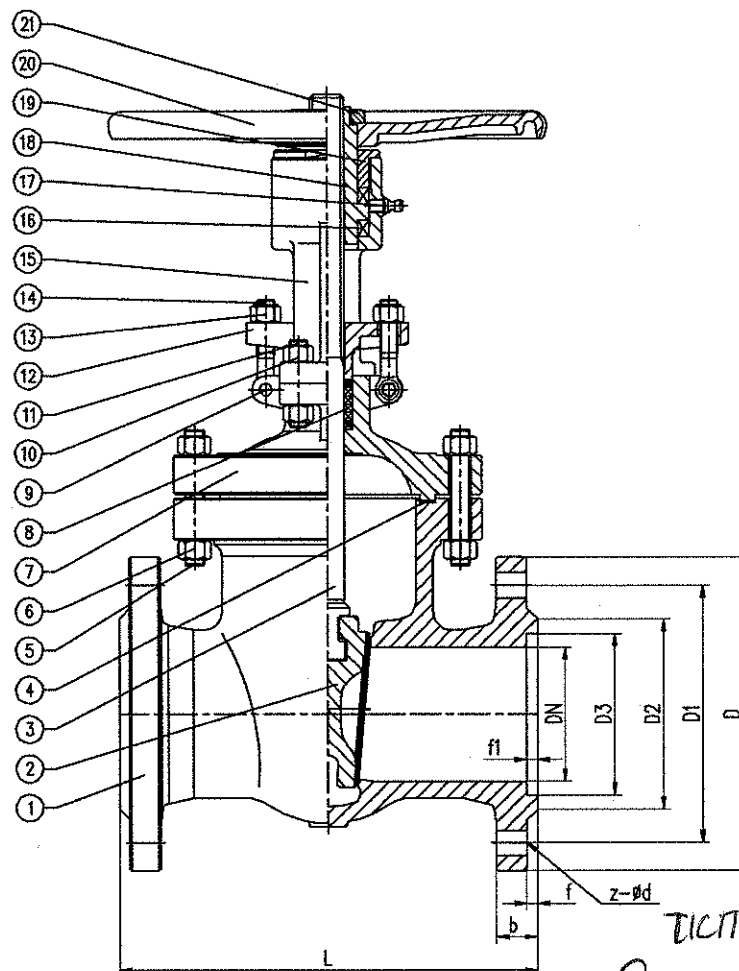

材料/Design & Manufacturing:

密封/Face to Face:

密封/Connection Dimensions:

密封/Test

密封/Suitable Temperature -29~425°C

密封/Suitable Media 水/气/W.O.G

性能/Performance Specification

密封/Nominal Pressure PN63

密封/Shell Test 9.45

密封/Seal Test 6.93

密封/Back Seal Test

密封/Air Seal Test 0.6

密封/Test Medium

MPa

水/Water

气/Air

3016 10/11/12

21	螺母/Nut	ASTM A29 1035	
20	手轮/Handwheel	ASTM A47 32510	
19	密封/Cover	ASTM A29 1035	
18	密封/Stem Nut	Brass	
17	密封/Cup	密封/Unit.	
16	密封/Bearing	密封/Unit.	
15	密封/Yoke	20GL	
14	密封/Eye Bolts	ASTM A193 B7	
13	密封/Nuts	ASTM A194 2H	
12	密封/Packing Gland	CS	
11	密封/Bolts	ASTM A193 B7	
10	密封/Nuts	ASTM A194 2H	
9	密封/Pin	CS	
8	密封/Packing	密封/Flexible Graphite	
7	密封/Bonnet	20GL	
6	密封/Nuts	ASTM A194 2H	
5	密封/Bolts	ASTM A193 B7	
4	密封/Gasket	SS+密封/Graphite	
3	密封/Stem	ASTM A182 F6a	
2	密封/Wedge	20GL+13Cr	
1	密封/Body	20GL+13Cr	
材料/No.	名称/Name	材料/Material	备注/Note

客户/Client:

合同/Contract:

DN/NPS:DN50

数量/Quantity:

重量/Weight:

产品名称/Product name: 闸阀/Gate Valve

设计/Designer:

日期/Date: 2024.4.20

压力等级/Class: PN63


型号/Type: Z41H-63C

总装图/Assemble Drawing

23.04.24. Composed

26 200

AHXR 21106306



50	292	175	135	102	88	3	3	26	z-ød
DN	L	D	D1	D2	D3	f	f1	b	