


6R 240 923

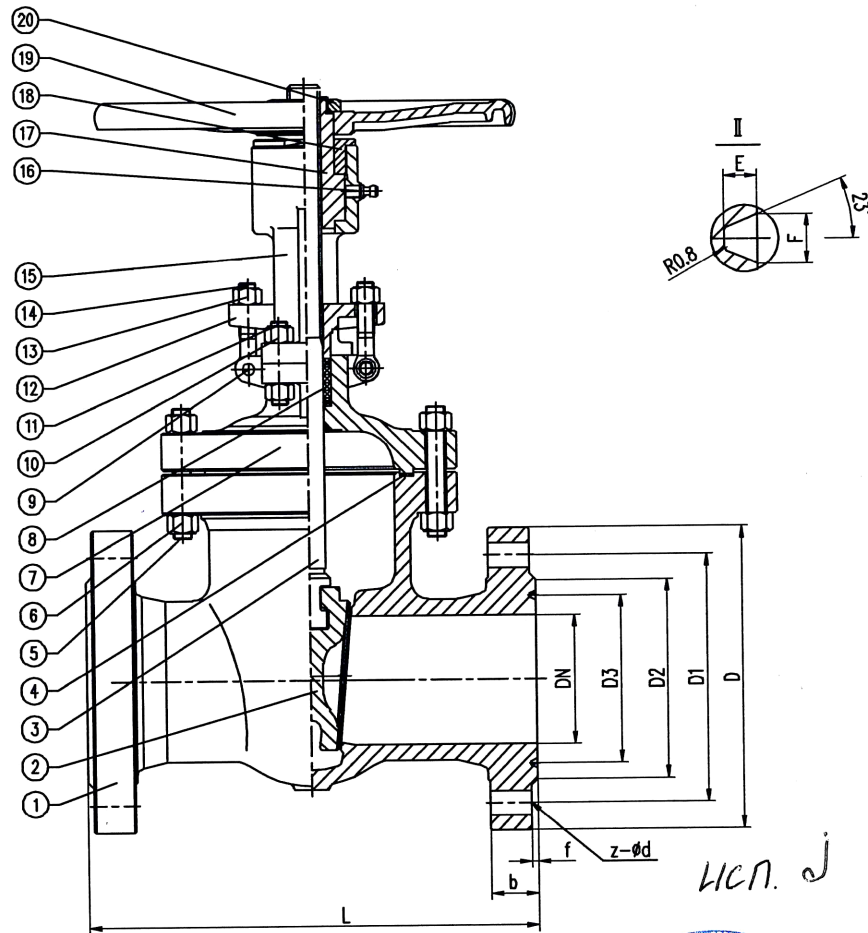

设计/Design & Manufacturing:

结构/Face to Face:

连接/Connection Dimensions:

试验/Test

适用温度/Suitable Temperature -29~425°C

适用介质/Suitable Media 水/气/W.O.G

性能/Performance Specification

公称压力/Nominal Pressure	PN63	试验介质/Test Medium	
壳体试验/Shell Test	9.45	MPa	水/Water
密封试验/Seal Test	6.93		
后密封试验/Back Seal Test			气/Air
气密封试验/Air Seal Test	0.6		

проект.
Д.Н. Р

Зод. 26.04.24
2024

20	螺母/Nut	ASTM A29 1035	
19	手轮/Handwheel	ASTM A47 32510	
18	盖板/Cover	ASTM A29 1035	
17	阀杆螺母/Stem Nut	Brass	
16	杯/Cup	铜/Unit.	
15	叉/Yoke	20GL	
14	吊钩/Eye Bolts	ASTM A193 B7	
13	螺母/Nuts	ASTM A194 2H	
12	填料函/Packing Gland	CS	
11	螺栓/Bolts	ASTM A193 B7	
10	螺母/Nuts	ASTM A194 2H	
9	销/Pin	ASTM A29 1045	
8	填料/Packing	柔性石墨/Flexible Graphite	
7	阀盖/Bonnet	20GL	
6	螺母/Nuts	ASTM A194 2H	
5	螺栓/Bolts	ASTM A193 B7	
4	密封环/Sealing Ring	SS+石墨/Graphite	
3	阀杆/Stem	ASTM A182 F6a	
2	楔/Wedge	20GL+13Cr	
1	阀体/Body	20GL+13Cr	
料/No.	名/Name	材/Material	注/Note

客户/Client:

合同/Contract:

DN/NPS: DN50-DN200

数量/Quantity:

重量/Weight:

产品名称/Product name: 闸阀/Gate Valve

设计/Designer:

日期/Date: 2023.7.4

压力等级/Class: PN63

型号/Type: Z41H-63C/J

总装图/Assemble Drawing

23.04.24. Сопровождающий

66 4111 АНХР 2024.04.24



50	292	175	135	102	85	3	8	12	26	4-ø22
DN	L	D	D1	D2	D3	f	E	F	b	z-ød