


GR240423

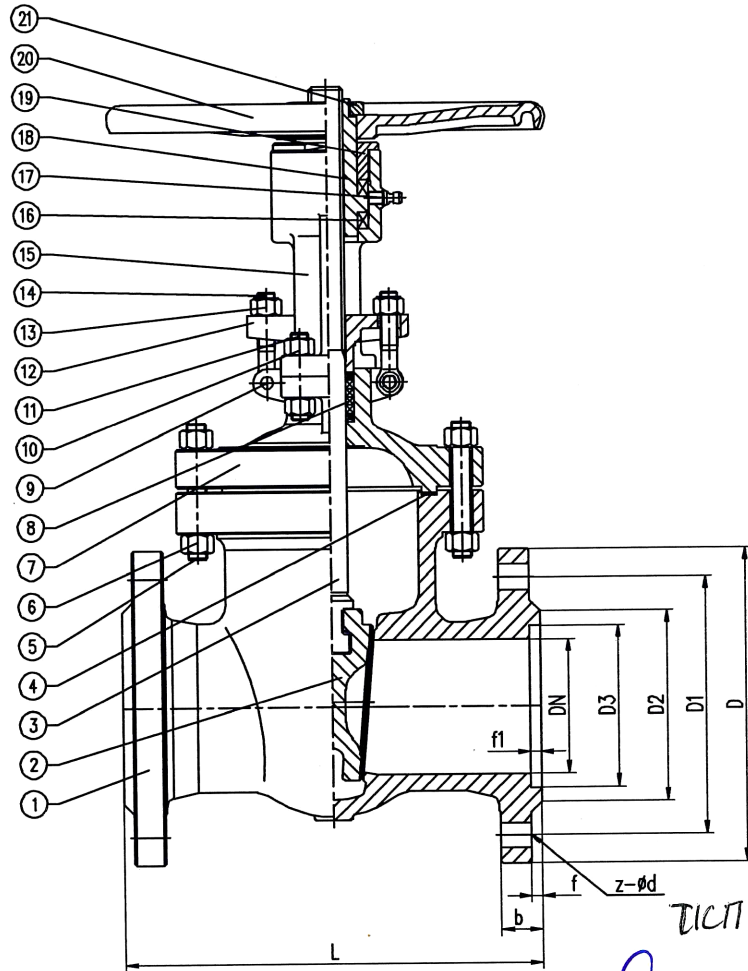

设计/Design & Manufacturing:

密封面/Face to Face:

连接尺寸/Connection Dimensions:

密封面/Test

适用温度/Suitable Temperature

适用介质/Suitable Media

性能/Performance Specification

公称压力/Nominal Pressure	PN63	试验介质/Test Medium	
壳体试验/Shell Test	9.45	MPa	水/Water
密封试验/Seal Test	6.93		
后密封试验/Back Seal Test		MPa	气/Air
气密封试验/Air Seal Test	0.6		

21	螺母/Nut	ASTM A29 1035	
20	手轮/Handwheel	ASTM A47 32510	
19	盖板/Cover	ASTM A29 1035	
18	阀杆螺母/Stem Nut	Brass	
17	杯/Cup	铜/Unit.	
16	轴承/Bearing	铜/Unit.	
15	叉/Yoke	20GL	
14	吊钩/Eye Bolts	ASTM A193 B7	
13	螺母/Nuts	ASTM A194 2H	
12	填料/Packing Gland	CS	
11	螺栓/Bolts	ASTM A193 B7	
10	螺母/Nuts	ASTM A194 2H	
9	销/Pin	CS	
8	填料/Packing	石墨/Flexible Graphite	
7	阀盖/Bonnet	20GL	
6	螺母/Nuts	ASTM A194 2H	
5	螺栓/Bolts	ASTM A193 B7	
4	垫片/Gasket	SS+石墨/Graphite	
3	阀杆/Stem	ASTM A182 F6a	
2	楔/Wedge	20GL+13Cr	
1	阀体/Body	20GL+13Cr	
料/No.	名称/Name	材料/Material	备注/Note

客户/Client:

合同/Contract:

DN/NPS:DN50

数量/Quantity:

重量/Weight:

产品名称/Product name:闸阀/Gate Valve

设计/Designer:

日期/Date:2024.4.20

压力等级/Class:PN63

型号/Type:Z41H-63C

总装图/Assemble Drawing

50	292	175	135	102	88	3	3	26	4	ø22
DN	L	D	D1	D2	D3	f	f1	b		z-ød