



Z941W-16P

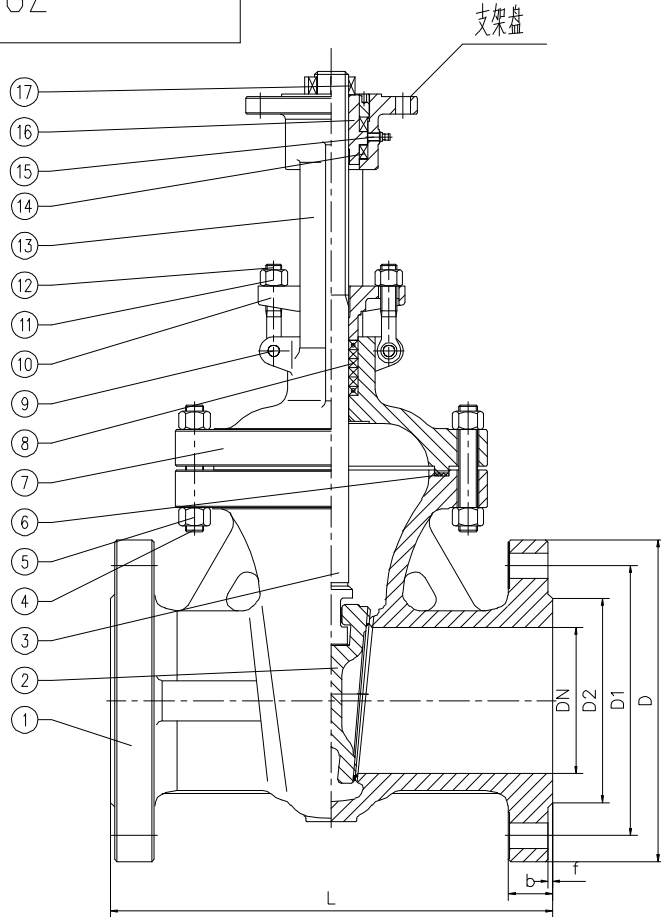

支架盘

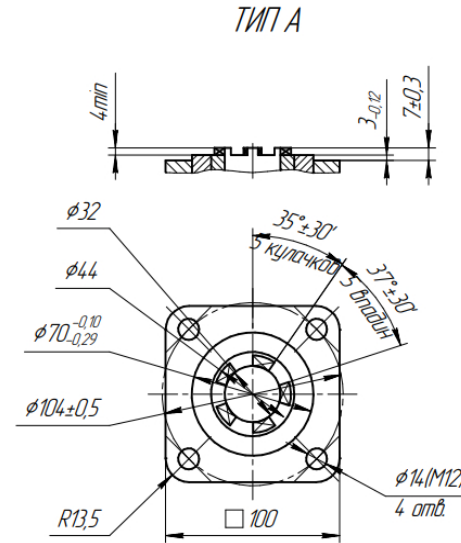

性能规范表

公称压力		1.6	MPa
试验压力	强度试验	2.4	
	密封试验	1.76	
	上密封试验	—	
	气密封试验	0.6	
适用温度		-29~425	℃
适用介质		水、蒸汽、油品等	

17	轴承压盖/Cover	ASTM A29 1035	
16	阀杆螺母/Stem Nut	Brass	
15	油杯/Cup	组件/Unit.	
14	轴承/Bearing	组件/Unit.	
13	支架/Yoke	CF8	
12	活络螺栓/Eye Bolts	A193 B8	
11	螺母/Nuts	A194 8	
10	填料压盖/Packing Gland	SS304	
9	销/Pin	SS	
8	填料/Packing	柔性石墨/Flexible Graphite	
7	阀盖/Bonnet	CF8	
6	垫片/Gasket	SS+石墨/Graphite	
5	螺母/Nuts	A194 8	
4	螺栓/Bolts	A193 B8	
3	阀杆/Stem	304	
2	阀板/Wedge	CF8	
1	阀体/Body	CF8	

序号/No.	名称/Name	材料/Material	备注/Note
客户/Client:			
合同/Contract:			
DN/NPS:DN50-300	产品名称/Product name:闸阀/Gate Valve	压力等级/Class:PN16	
数量/Quantity:	设计/Designer:	型号/Type:Z941W-16P	
重量/Weight:	日期/Date:	总装图/Assemble Drawing	

150	280	280	240	212	3	24	8-ø22
DN	L	D	D1	D2	f	b	z-ød