


433 201403-433


Z41H-40C



06.03.24

性能规范表

公称压力		4.0	Mpa
试验压力	壳体	6.0	
	密封	4.4	
适用介质		水、蒸汽、油品等	

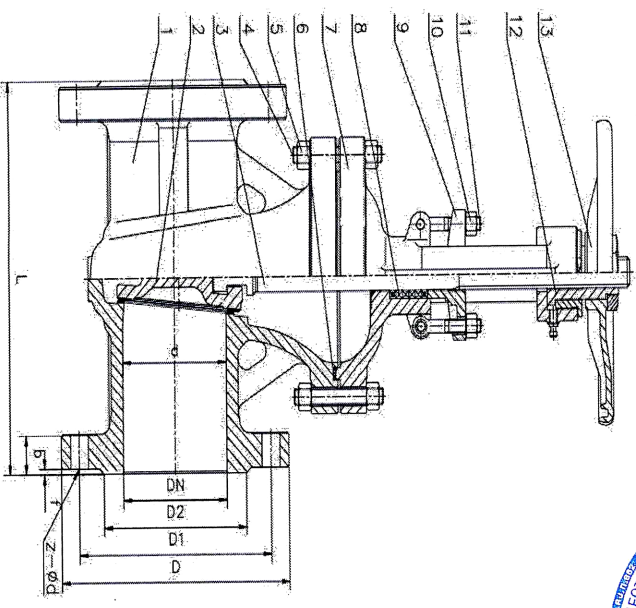

300	750	510	450	410	4	46	300	16-φ33
250	650	445	385	345	3	42	250	12-φ33
200	550	375	320	285	3	38	200	12-φ30
150	450	300	250	212	3	30	150	8-φ26
100	350	230	190	158	3	24	100	8-φ22
80	310	195	160	133	3	22	80	8-φ18
50	250	160	125	102	3	20	50	4-φ18
DN	L	D	D1	D2	f	b	d	z-φd

序号 名称 材料 备注

1	阀体/Body	20Г11+13Cr	
2	闸板/Wedge	20Г11+13Cr	
3	阀杆/Stem	2Cr13	
4	螺栓/Bolts	45#	
5	螺母/Nuts	35#	
6	垫片/Gasket	SS+石墨/Graphite	
7	阀盖/Bonnet	20Г11	
8	填料/Packing	柔性石墨/Flexible Graphite	
9	填料压盖/Packing Gland	CS	
10	螺母/Nuts	35#	
11	螺栓/Bolts	45#	
12	阀杆螺母/Stem Nut	Brass	
13	手轮/Handwheel	QT350	

温州盖瑞阀门有限公司

800001544K