


Z41H-25C

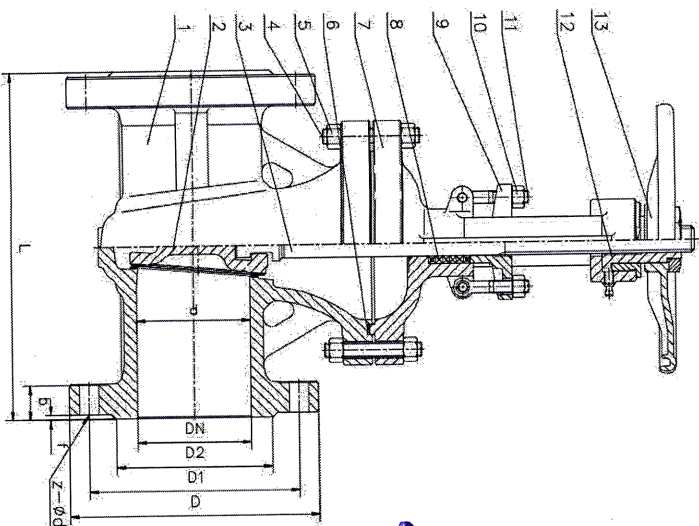

06.09.24

性能规范表

性能规范表		
试验压力	公称压力	2.5
	壳体	3.75
	密封	2.75
适用介质		水、蒸汽、油品等

300	500	485	430	390	4	40	300	16-φ30
250	450	425	370	335	3	36	250	12-φ30
200	400	360	310	278	3	34	200	12-φ26
150	350	300	250	212	3	30	150	8-φ26
125	325	270	220	184	3	28	125	8-φ26
100	300	230	190	159	3	24	100	8-φ22
80	280	195	160	133	3	22	80	8-φ18
65	265	180	145	120	3	22	65	8-φ18
50	250	160	125	102	3	20	50	4-φ18
DN	L	D	D1	D2	f	b	d	z-φd

序号	名称	材料	备注
1	阀体/Body	20F1+13Cr	
2	闸板/Wedge	20F1+13Cr	
3	阀杆/Stem	2Cr13	
4	螺栓/Bolts	45#	
5	螺母/Nuts	35#	
6	垫片/Gasket	SS+石墨/Graphite	
7	阀盖/Bonnet	20F1	
8	填料/Packing	柔性石墨/Flexible Graphite	
9	填料压盖/Packing Gland	CS	
10	螺母/Nuts	35#	
11	螺栓/Bolts	45#	
12	阀杆螺母/Stem Nut	Brass	
13	手轮/Handwheel	QT350	

温州盖瑞阀门有限公司

309669HX