



A-A




TECHNICAL REQUIREMENT

1. DESIGN: JB/T 12006 ;
2. FACE TO FACE: JB/T 12006 ;
3. THE SIZE OF THE WELDING GROOVE: GB/T 985.1
4. PRESSURE TEST: GB/T 13927 ;
5. DRIVE DEVICE CONNECTION PLATE SIZE: GB/T 12223 ;
6. THE PAINT COLOR IS: PR02.

PERFORMANCE SPECIFICATIONS

SIZE (mm)	300~1400
PRESSURE (MPa)	2.5
TEMPERATURE (°C)	-29~200
TEST PRESSURE (MPa)	SHEEL 3.8 (WATER) SEAL 2.8 (WATER) LOW PRESSURE SEAL 0.7 (AIR)
MEDIUM	WATER, OIL, STEAM

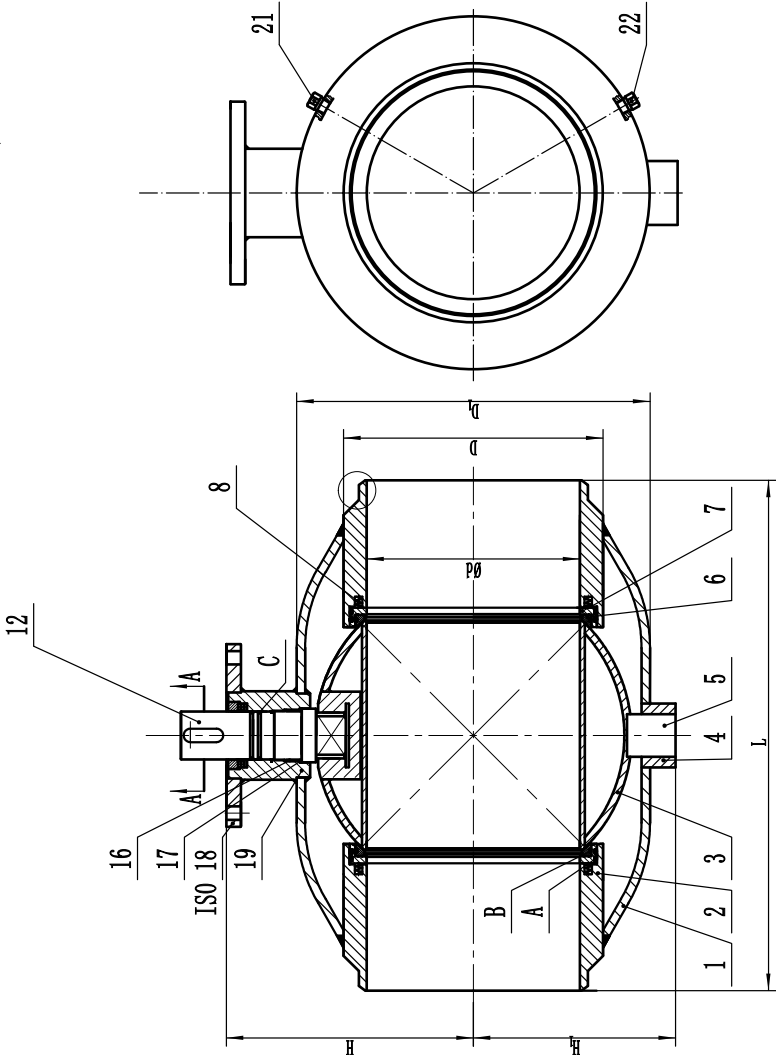

22	Brain valve		A105+galvanize		
21	Air avacuation valve		A105+galvanize		
20	“O” RING A/B/C		VTION		
19	STEM SLEEVE		20#		
18	CONNECTING FLANGE		Q235		
17	WASHER		PTFE+20MC		
16	BEARING		Coppre base+PTFE		
			GRAPHITE		
			20#		
12	STEM		2Cr13		
8	SPRING		304		
7	SEAT		20#		
6	SEALING RING		PTFE+20MC		
5	STEM		2Cr13		
4	STEM SLEEVE		20#		
3	BALL		304		
2	VALVE TUBE		20#		
1	BODY		20#		
NO.	NAME		MATERIAL		

SIZE	L	Ød	Ø1	Ø2	Ø3	Ø4	L	L1	H	H1	D	D1	N.M	ISO
DN300	762±4	300	311	314	325	65	51	22	390	330	377	520	1370	F25
DN350	838±4	350	363	366	377	65	51	22	430	360	406	580	2075	F25
DN400	991±4	400	412	415	426	65	51	22	435	365	460	590	3250	F25
DN450	991±4	450	464	467	480	75	61	22	485	410	510	680	3900	F30
DN500	1143±5	500	514	517	530	90	76	25	575	480	562	810	6605	F30
DN600	1380±5	589	614	617	630	110	94	28	680	580	660	980	9690	F30
DN700	1524±5	684	702	705	720	120	102	32	755	655	760	1130	17710	F35
DN800	1727±5	765	800	803	820	130	112	32	814	805	860	1250	26435	F40
DN900	1900±5	875	900	903	920	153	128	45	903	855	960	1405	33350	F40
DN1000	2100±5	975	996	999	1020	178	153	45	950	860	1060	1580	45690	F48
DN1200	2250±5	1169	1170	1173	1220	210	182	50	1100	1010	1280	1680	62595	F60
DN1400	2680±5	1360	1370	1376	1420				1397	1382	1455	2260		

YUANDA VALVE GROUP., LTD

Full-welded steel ball valve

Q367F-25 DN300~1400