

两片式德标高平台法兰球阀

2-PC BALL VALVE DIN-F4 ISO 5211

WWW.WODVALVE.COM WOD@WODVALVE.COM

WOD VALVE
WOD® WJ®

设计标准 (DESIGN STANDARD) : ASME B16.34 GB/T12237



产品型号 (PRODUCT STYLE) : Q41F-16 (C/P/R)

公称压力 (WORKING PRESSURE) : 1.6Mpa

适用温度 (TEMPERATURE RANGE) : -20℃~150℃

材 质 (MATERIAL) : ASTM-A351-CF8M、ASTM-A351-CF8、ASTM-A351-WCB

检验标准 (TEST&INSPECTION) : API598 JB/T9092

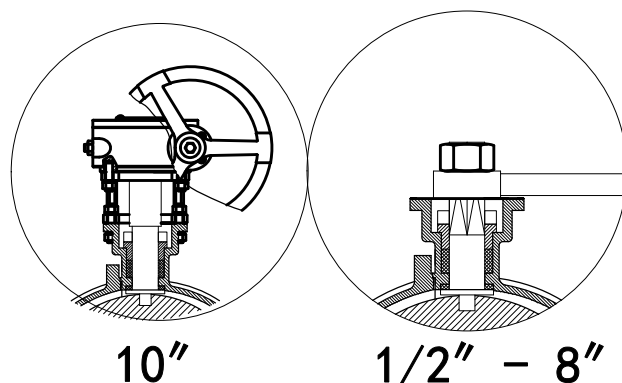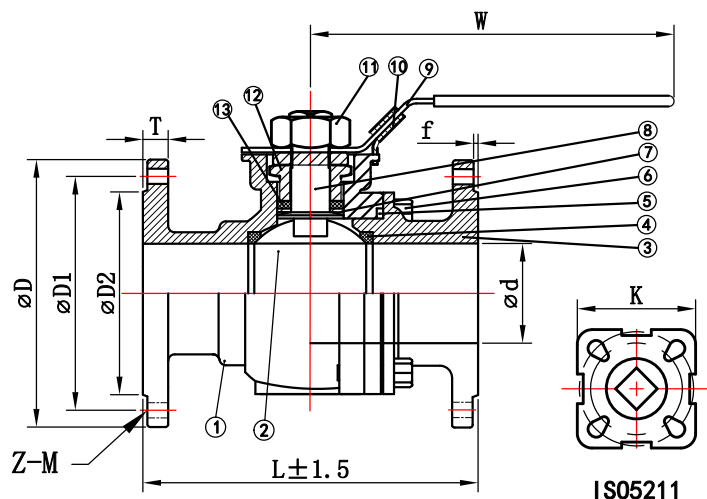

主要零部件材料 (MAIN PARTS MATERIALS) :

NO.	PART NAME	MATERIAL	QTY
1	阀体 BODY	CF8/CF8M	1
2	球体 BALL	SS304/SS316	1
3	阀盖 CAP	CF8/CF8M	1
4	阀座 SEAT	PTFE	2
5	密封圈 SEAL RING	PTFE	1
6	外六角螺栓 HEX HEAD BOIT	SS201	4~12
7	止推垫圈 THRUST WASHER	PTFE	1
8	阀杆 STEM	SS304/SS316	1
9	锁 LOCK	SS201	1
10	手柄 HANDLE	SS201	1
11	螺母 NUT	SS304	1
12	压盖 GLAND	SS304	1
13	填料 PACKING	PTFE	1

主要尺寸 (MAIN SIZE) :

DIMENSION LIST

DN	d	D	D1	D2	T	f	L±1.5	W	NM	Z-M	H	C	ISO5211
15	15	95	65	45	14	2	116	137	2.1	4*ø14	77.5	9	F03/F05
20	20	105	75	58	16	2	120	137	3.8	4*ø14	83.5	9	F03/F05
25	25	115	85	68	16	2	126	167	7.5	4*ø14	117.5	11	F04/F05
32	32	140	100	78	16	2	130	167	9.8	4*ø18	121	11	F04/F05
40	40	150	110	88	16	3	141	197	10.5	4*ø18	119	14	F05/F07
50	49	165	125	102	17	3	150	197	16.7	4*ø18	130.5	14	F05/F07
65	65	185	145	122	17	3	171	245	28.2	4*ø18	146.5	17	F07/F10
80	79	200	160	138	18	3	181	265	32.1	8*ø18	170	17	F07/F10
100	99	220	180	158	18	3	190	295	60.2	8*ø18	189	17	F07/F10
125	125	250	210	188	22	3	329	530	97.5	8*ø18	190	22	F10/F12
150	150	285	240	212	22	3	356	530	108	8*ø22	215	27	F10/F12
200	200	340	295	268	24	3	398	625		12*ø22	285	27	F12/F14
250	250	405	355	320	26	3	449	900		12*ø26	320	34	F12/F14