



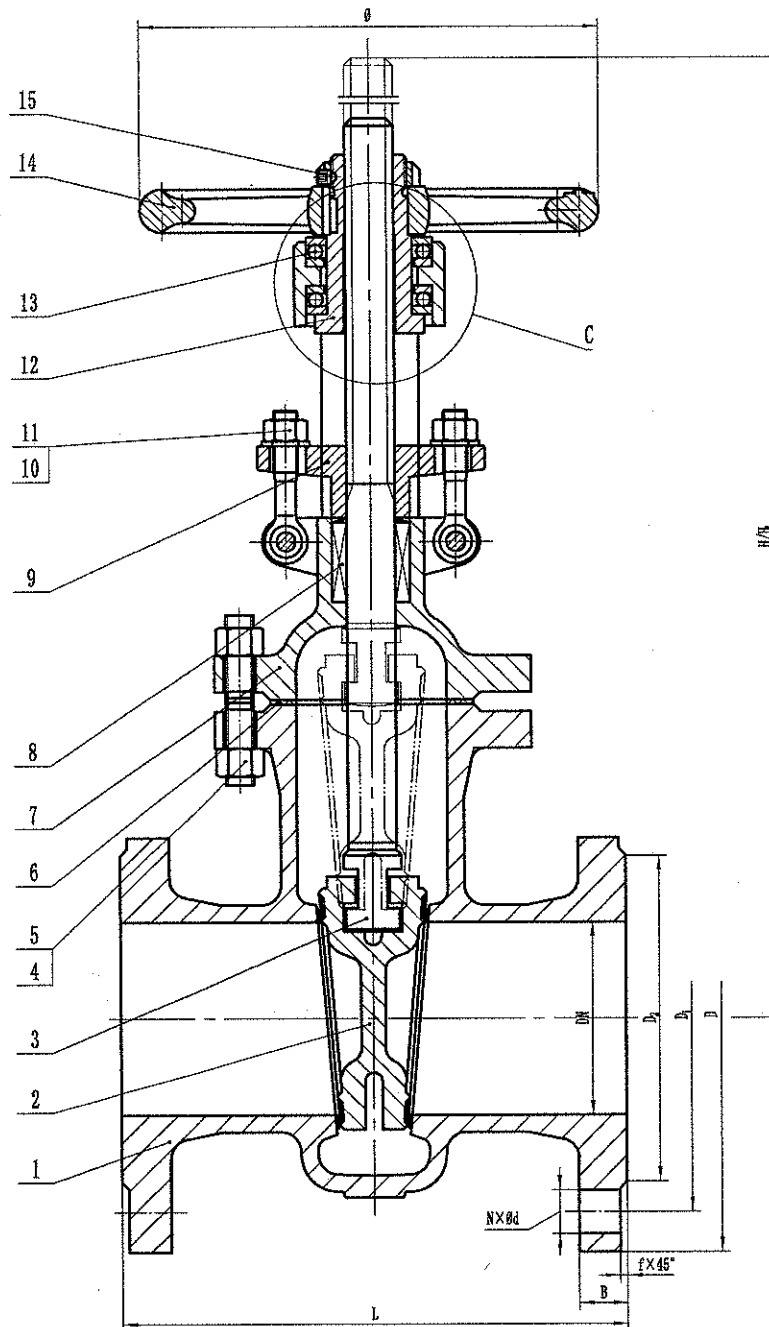

C
Enlarge

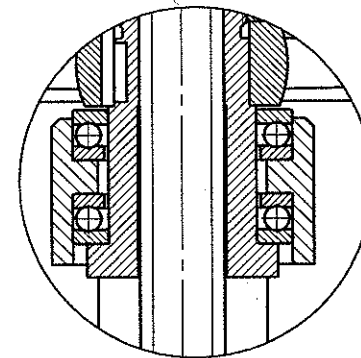

SPECIFICATION

DN	50-200	
PN, MPa	1.6	
TEMPERATURE°C	-29~425	
TEST (MPa/WATER)	SHELL	2.4
	SEAL	1.8
	BACK SEAL	N/A
	AIR SEAL	0.4-0.7
MEDIUM	WATER STEAM, OIL	

Signature
14.05.25

SIZE	ITEM	DN	D	D ₁	D ₂	B-f	N×Ød	H	H ₁	#	L
DN50		50	160	125	102	17-3	4×Ø18	332	396	190	180±2
DN80		78	195	160	133	20-3	4×Ø18	373	467	215	210±2
DN100		95	215	180	158	20-3	8×Ø18	420	534	240	230±2
DN150		145	280	240	212	24-3	8×Ø22	560	715	285	280±2
DN200		195	335	295	268	27-3	12×Ø22	696	903	330	330±2

15	LOCK NUT	35#STEEL			
14	HANDWHEEL	QT450-10			
13	BEARING				
12	STEM NUT	BRASS (ZCuAl10Fe3)			
11	NUT	35#STEEL			
10	BOLT	45#STEEL			
9	PACKING GLAND	WCB			
8	PACKING	FLEXIBLE GRAPHITE			
7	BONNET	WCB			
6	BONNET GASKET	08-FG			
5	NUT	35#STEEL			
4	STUD BOLT	45#STEEL			
3	STEM	2Cr13			
2	DISC	WCB+13Cr			
1	BODY	WCB+13Cr			
NO.	NAME	QTY	MATERIAL		

YUANDA VALVE GROUP CO.,LTD

GATE VALVE
(WCB)

DZ40R-16C-50-200