


GR 240423

Z41H-40C



Исн F

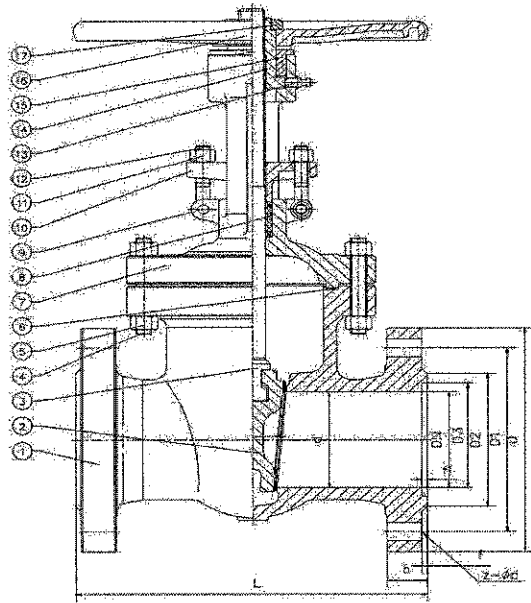

性能规范表

公称压力		4.0	Mpa
试验压力	壳体	6.0	
	密封	4.4	
适用介质		水、蒸汽、油品等	

序号	名称	材料	备注
1	阀体/Body	WCB+13Cr	
2	闸板/Wedge	WCB+13Cr	
3	阀杆/Stem	2Cr13	
4	螺栓/Bolts	45#	
5	螺母/Nuts	35#	
6	垫片/Gasket	SS+石墨/Graphite	
7	阀盖/Bonnet	WCB	
8	填料/Packing	柔性石墨/Flexible Graphite	
9	填料压盖/Packing Gland	CS	
10	螺母/Nuts	35#	
11	螺栓/Bolts	45#	
12	阀杆螺母/Stem Nut	Brass	
13	手轮/Handwheel	QT350	

24.04.24г. Сомасован.

80	283 ✓	195	160	133	121 ✓	3	3	22	8-φ18
DN	L	D	D1	D2	D3	f	f1	b	z-φd