

序号No.	配件名称 Spare Parts	材料 Material	5	导向垫 Guide Pad	PTFE	10	阀杆 Stem	2Cr13(SS420)
1	底板 Bottom plate	Q235(Cr. D)	6	填料 Packing	PTFE(EPDM)	11	支架头 Yoke head	GGG40
2	阀体 Body	GGG40	7	压板 Packing Gland	Q235(Cr. D)	12	伞齿轮 Bevel Gear	组合件Assembly
3	闸板 Disc	SS316L	8	夹头 Chuck	WCB		标准件 Bolts/Nuts	镀锌铁 Fe+Zn
4	阀座 Seat	NR	9	支架板 Yoke	Q235(Cr. D)			

备注(Note): 1、设计按(Design): JB/T8691-2013
2、法兰按(Flange): GB/T9113.1-2010
3、结构长度按(Face to face):
GB/T15188.2-94 chart6-7
4、试验和验收(Testing): GB/T13927-2008

刀闸阀主要外形及连接尺寸

Outline and Dimension

型号Model: QWZ573NM-10G



通径	尺寸 size													
DN (mm)	L	LI	D	D1	D2	D0	N-Th	T	●	⊕	d	H1		
50	53	55	165	125	99	250	4-M16	12	4	0	Ø18	385		
65	53	55	185	145	118	250	4-M16	12	4	0	Ø18	390		
80	55	57	200	160	132	250	8-M16	12	4	4	Ø18	470		
90	55	57	210	170	142	250	8-M16	12	4	4	Ø18	495		
100	55	57	220	180	156	250	8-M16	12	4	4	Ø18	520		
125	62	64	250	210	184	250	8-M16	14	4	4	Ø18	569		
150	62	64	285	240	211	250	8-M20	14	4	4	Ø23	623		
175	62	64	305	265	237	250	12-M20	14	8	4	Ø23	645		
200	75	77	340	295	266	250	8-M20	18	4	4	Ø23	695		
225	75	77	350	310	282	250	12-M20	18	8	4	Ø23	745		
250	75	77	395	350	319	300	12-M20	18	8	4	Ø23	830		
300	82	84	445	400	370	300	12-M20	20	8	4	Ø23	950		
350	82	84	505	460	429	450	16-M20	20	12	4	Ø23	1060		
400	95	99	565	515	480	450	16-M24	24	12	4	Ø27	1135		
450	95	99	615	565	530	450	20-M24	24	16	4	Ø27	1200		
500	135	129	670	620	582	500	20-M24	27	16	4	Ø27	1560		
550	125	129	725	680	638	500	20-M27	27	16	4	Ø30	1510		
600	125	129	780	735	682	500	20-M27	27	16	4	Ø30	1680		
650	125	129	845	780	732	500	24-M27	27	20	4	Ø30	1635		
700	138	143	895	840	794	600	24-M27	27	20	4	Ø30	1715		
750	138	143	970	900	855	600	24-M30	30	20	4	Ø33	1815		
800	138	143	1015	950	901	600	24-M30	30	20	4	Ø33	1935		
850	138	143	1070	1000	955	600	28-M30	30	24	4	Ø33	2035		
900	138	143	1115	1050	1001	600	28-M30	30	24	4	Ø33	2145		
1000	159	165	1280	1180	1112	600	28-M33	33	24	4	Ø36	2385		
1100	159	165	1340	1260	1230	600	28-M33	33	24	4	Ø36	0		
1200	166	172	1455	1380	1328	600	32-M36	36	28	4	Ø39	0		
1350	181	187	1630	1540	1460	600	36-M39	39	32	4	Ø42	0		
1400	181	187	1675	1580	1530	600	36-M39	39	32	4	Ø42	0		
1500	208	214	1795	1705	1640	600	40-M39	39	36	4	Ø42	0		
1600	208	214	1915	1820	1750	600	40-M45	45	36	4	Ø46	0		
1800	229	235	2115	2020	1950	600	44-M45	45	40	4	Ø46	0		
2000	260	266	2325	2230	2150	600	48-M45	45	44	4	Ø46	0		

刀闸阀 Knife Gate Valve


QWZ573NM-10G

温州奇胜阀门制造有限公司


WENZHOU CHISUN VALVE MANUFACTURING CO., LTD

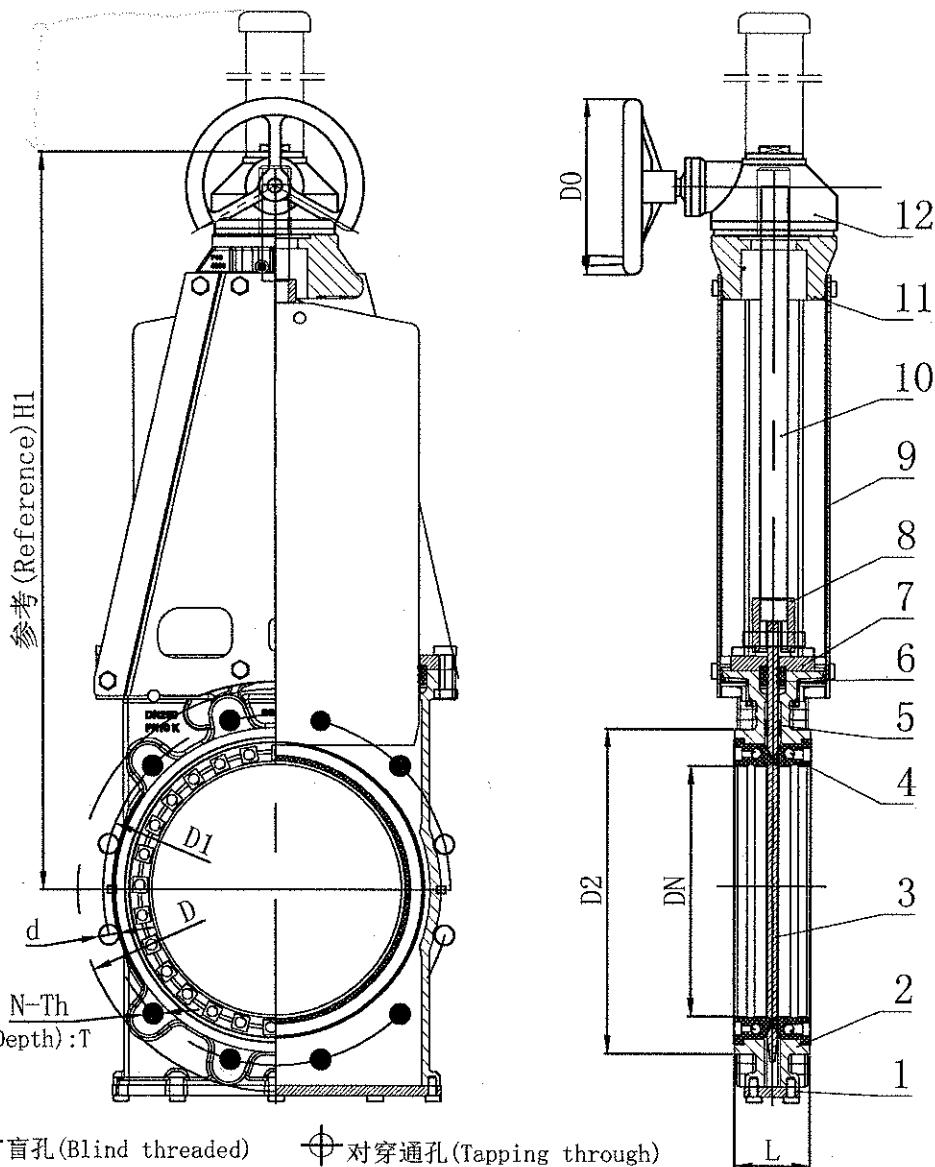


DN50-200




DN250-2000



DN500-2000



Detail II



1(可选)
optional

● 盲孔(Blind threaded) ⊕ 对穿通孔(Tapping through)