

一片式球阀（轻型）

WOD VALVE

1-PC BALL VALVE WITH LOCKING

WOD® SIM®

设计标准 (DESIGN STANDARD): ASME B16.34 GB/T12237

螺纹标准 (THREADED ENDS): PT, BSP, BSPT, BSP, NPT, DIN2999, DIN259, DIN EN ISO228,



产品型号 (PRODUCT STYLE): Q11F-1000WOG (C/P/R)

公称压力 (WORKING PRESSURE): 1000PSI


适用温度 (TEMPERATURE RANGE): -20°C~180°C

材 质 (MATERIAL): ASTM-A351-CF8M, ASTM-A351-CF8, ASTM-A216-WCB

检验标准 (TEST&INSPECTION): API598 JB/T9092

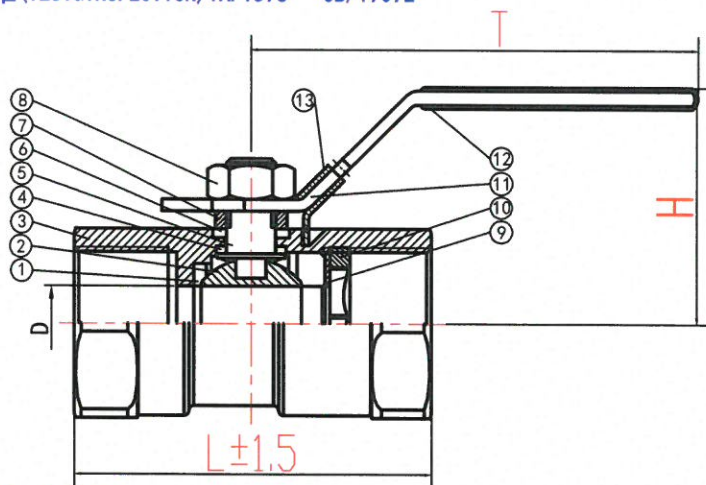

□ Without lock device



□ With lock device

主要零部件材料 (MAIN PARTS MATERIALS):

序号 NO.	零件名称 PART NAME	材质 MATERIAL	数量 QTY
1	阀座 SEAT	PTFE/RPTFE	2
2	球体 BALL	S304/S316	1
3	阀体 BODY	WCB/CF8/CF8M	1
4	止推垫圈 THRUST WASHER	PTFE/RPTFE	1
5	阀杆 STEM	S304/S316	1
6	填料 PACKING	PTFE/RPTFE	1
7	压盖 GLAND	S201/S304	1
8	螺母 NUT	S201/S304	1
9	垫圈 WASHER	S201/S304	1
10	柄帽 RETAINER	S304/S316	1
11	手柄 HANDLE	S201/S304	1
12	手柄套 HANDLE COVER	PVC	1
13	锁 LOCK	S201/S304	1



主要尺寸 (MAIN SIZE):

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
DN	8	10	15	20	25	32	40	50	65	80	100
D	5	7	9.1	12	15	20	25	32	38	50	65
L±1.5	41	44	52	55	66	75	81	93	110	133	182.5
H	34	35	39	55	57	67	70	78.5	88	97.5	135
T	79	79	104	104	104	109	127	140	159	167	203
KG	0.065	0.09	0.155	0.225	0.3	0.495	0.705	1.05	1.975	2.74	4.87