


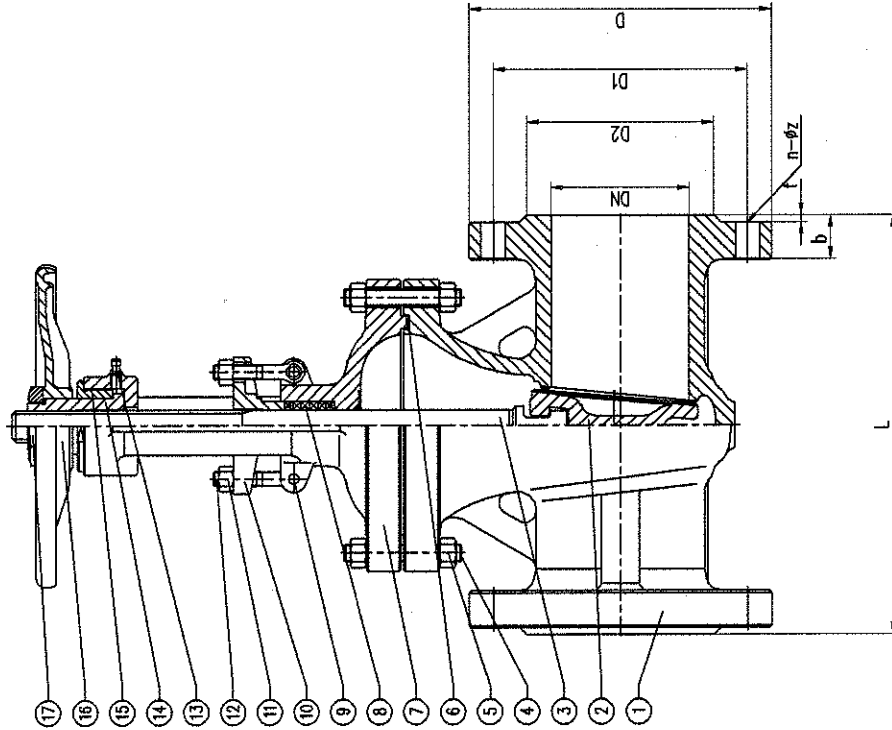

250	650	445	385	345	3	42	12-φ33
100	350	230	190	158	3	24	8-φ22
80	310	195	160	133	3	22	8-φ18
50	250	160	125	102	3	20	4-φ18
DN	L	D	D1	D2	f	b	Z-φd

設計/Design & Manufacturing:		性能/Performance Specification			
密封/Face to Face:		公稱/Nominal Pressure	PN40		試驗/Test Medium
密封/Connection Dimensions:		殼體/Shell Test	6.0		MPa
密封/Seal Test:		密封/Seal Test	4.4		
適用/Suitable Temperature	-29~425℃	殼體/Back Seal Test	4.4		MPa
適用/Suitable Media	水、空氣/W.O.G	密封/Air Seal Test	0.6		
					試驗/Test Medium

Signature
25.10.2023

17	Nut	ASTM A29 1035	
16	Handwheel	ASTM A47 32510	
15	Cover	ASTM A29 1035	
14	Stem Nut	ASTM B148 C95800	
13	Cup	Unit.	
12	Eye Bolts	ASTM A193 B7	
11	Nuts	ASTM A194 2H	
10	Packing Gland	ASTM A216 WCB	
9	Pin	ASTM A29 1045	
8	Packing	Flexible Graphite	
7	Bonnet	ASTM A216 WCB	
6	Gasket	SS+Graphite	
5	Nuts	ASTM A194 2H	
4	Bolts	ASTM A193 B7	
3	Stem	ASTM A182 F6a	
2	Wedge	ASTM A216 WCB+13Cr	
1	Body	ASTM A216 WCB+13Cr	
No.	Name	Material	Note

Client:	
Contract:	
DN/NPS: DN50-250	Product name: Gate Valve
Quantity:	Pressure Class: PN40
Weight:	Design/Designer:
	Model/Type: Z41H-PN40
	Date: 2023.10.23
	Assembly Drawing