


287.6

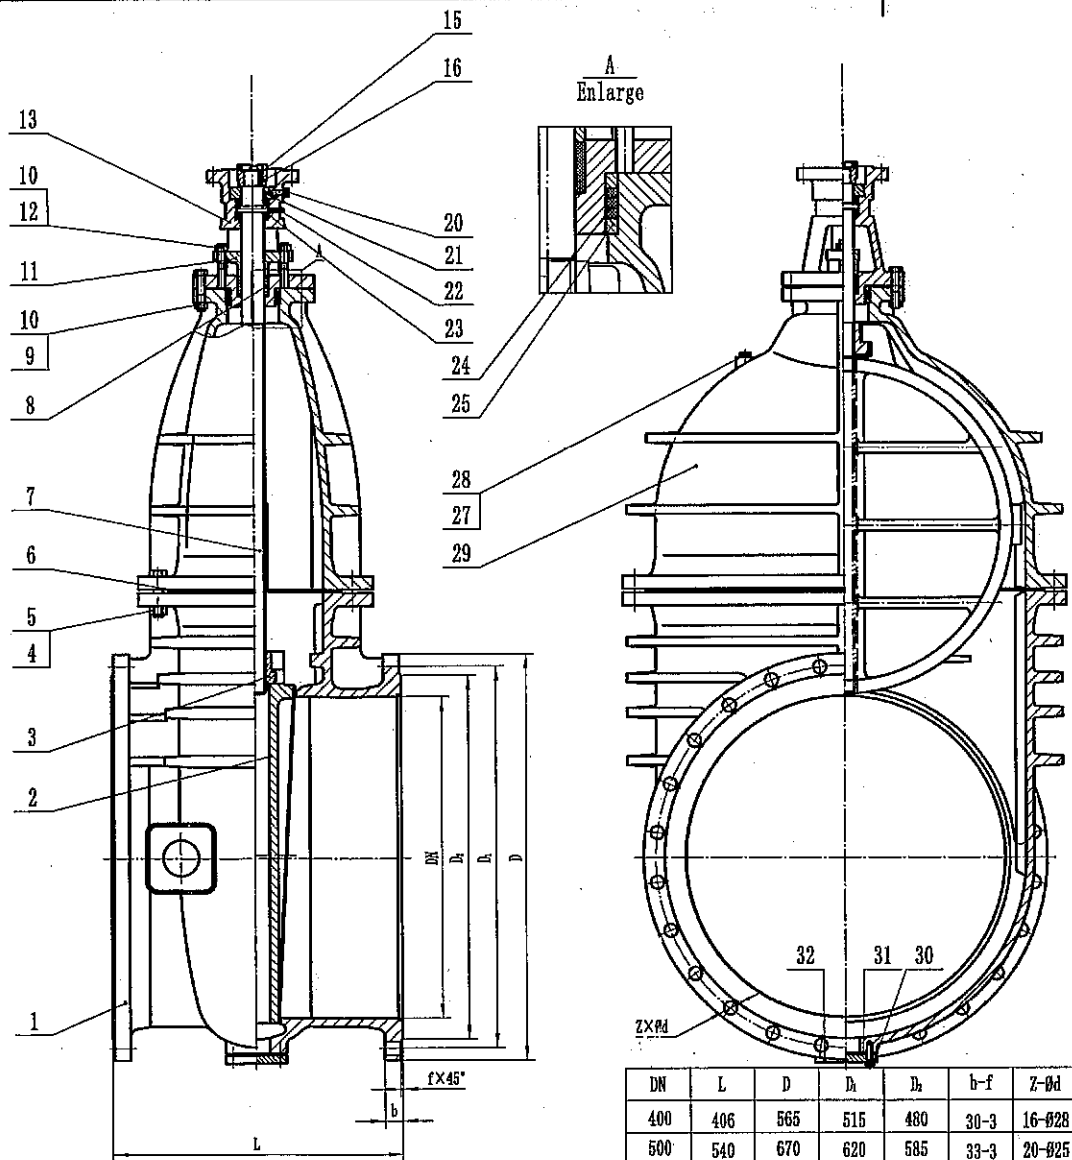

DN	L	D	D ₁	D ₂	b-f	Z-Ød
400	406	565	515	480	30-3	16-Ø28
500	540	670	620	585	33-3	20-Ø25
600	600	780	725	685	36-5	20-Ø30
700	660	895	840	800	40-5	24-Ø30
800	720	1010	950	905	44-5	24-Ø34
900	780	1110	1050	1005	46-5	28-Ø34
1000	840	1220	1160	1115	50-5	28-Ø34
1200	960	1450	1380	1325	56-5	32-Ø41
1400	1080	1675	1590	1530	62-5	36-Ø43
1600	1000	1915	1820	1750	68-5	40-Ø49

SPECIFICATION

SIZE	DN400-1600	
PRESSURE MPa	1.0	
TEMPERATURE °C	-10~100	
TEST PRESSURE MPa	SEAL	1.1
	SHELL	1.5
MEDIUM	Copper sealing surface	WATER
	Iron sealing surface	OIL

32	BONNET	HT200			
31	BONNET GASKET	XB200			
30	BOLT	35			
29	BONNET	HT200			
28	BOLT	35			
27	PTFE TAPE	PTFE			
26	EYEBOLT	25			
25	BONNET GASKET	XB300			
24	O RING	NBR			
23	BEARING	轴承			
22	OIL CUP				
21	BEARING SLEEVE	HT200			
20	BOLT	35			
16	SLEEVE	Q235			
15	PIN	45			
13	YOKE	HT200			
12	BOLT	35			
11	PACKING GLAND	HT200			
10	NUT	25			
9	BOLT	35			
8	PACKING	GRAPHITE			
7	STEM	2Cr13			
6	BONNET GASKET	NBR/XB300			
5	NUT	25			
4	BOLT	35			
3	STEM NUT	QT450-10			
2	DISC	HT200			
1	BODY	HT200			
NO.	NAME	MATERIAL			

YUANDA VALVE GROUP., LTD

GATE VALVE

Z945T/W-10-400-1600