



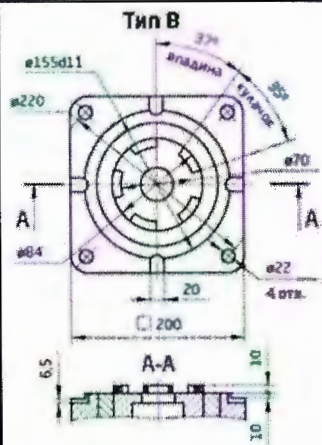

DN300

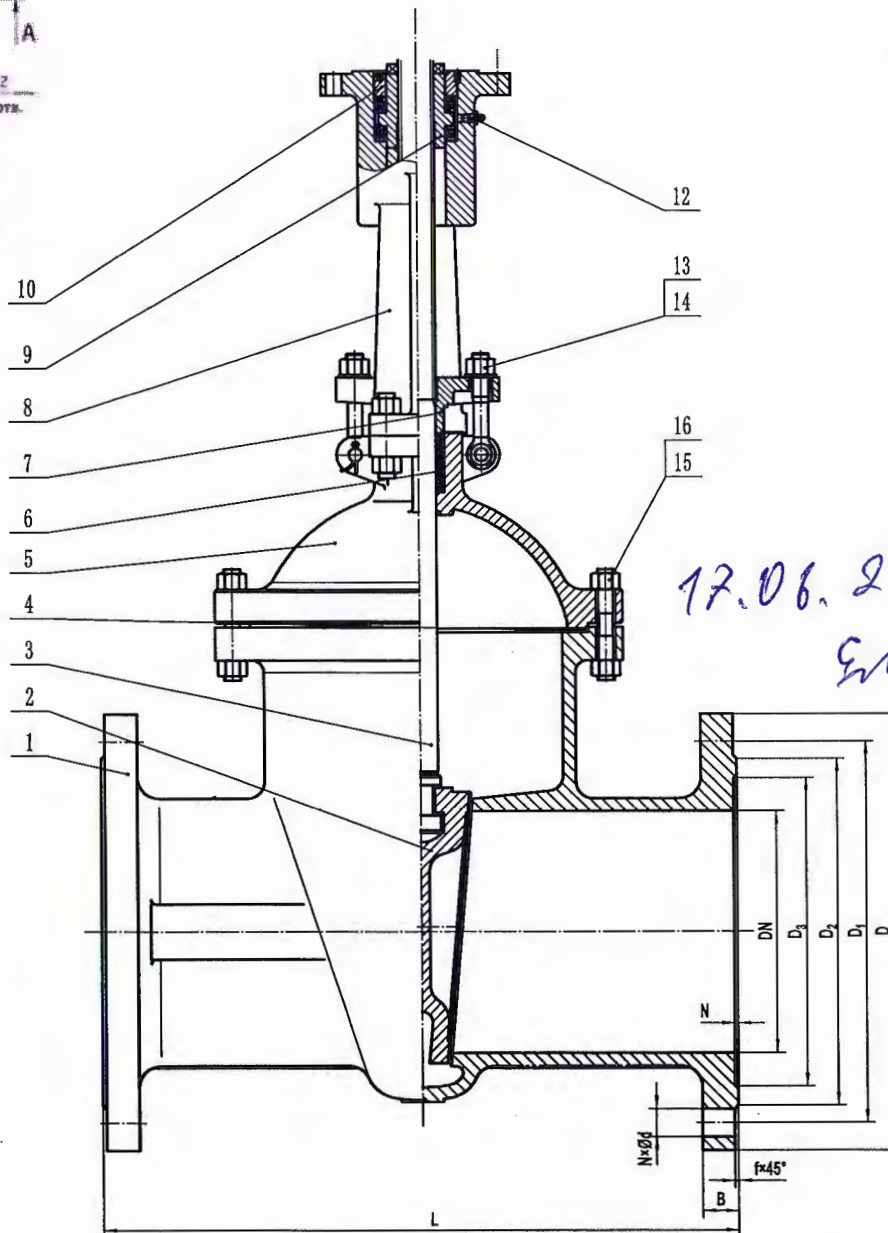

TECHINICAL REQUIREMENT

- 1.DESIGN ACCORDING TO GB/T 12234
- 2.FACE TO FACE ACCORDING TO GB/T 12221
- 3.FLANGE CONNECTION ACCORDING TO GB/T 9113
- 4.TEST ACCORDING TO GB/T 26480

SPECIFICATION

SIZE	DN50-400	
PRESSURE MPa	6.4	
TEMPERATURE℃	-29~425	
TEST PRESSURE MPa	SEAL(WATER)	7.15
	STRENGTH(WATER)	9.75
	BACK SEAT (WATER)	7.15
	LOW PRESSURE SEAL (GAS)	0.4~0.7
MEDIUM	WATER/OIL/GAS	

SIZE	ITEM	DN	D ₃	D ₂	D ₁	D	B-f	N×Ød	L
DN50		Ø50	Ø88	Ø99	Ø135	Ø180	26-4	4×Ø22	250±1
DN65		Ø63	Ø110	Ø118	Ø160	Ø205	26-4	8×Ø23	280±1
DN80		Ø76	Ø121	Ø132	Ø170	Ø215	28-4	8×Ø23	310±1
DN100		Ø96	Ø150	Ø156	Ø200	Ø250	30-4.5	8×Ø26	350±1
DN125		Ø121	Ø176	Ø184	Ø240	Ø295	34-4.5	8×Ø30	400±1
DN150		Ø146	Ø204	Ø211	Ø280	Ø345	36-4.5	8×Ø33	450±1
DN200		Ø190	Ø280	Ø284	Ø345	Ø415	42-4.5	12×Ø36	550±1
DN250		Ø238	Ø313	Ø345	Ø400	Ø470	46-4.5	12×Ø36	650±1
DN300		Ø285	Ø364	Ø409	Ø460	Ø530	52-4.5	16×Ø36	750±1
DN350		Ø330	Ø422	Ø465	Ø525	Ø600	56-5	16×Ø39	850±1
DN400		Ø380	Ø474	Ø535	Ø585	Ø670	60-5	16×Ø42	950±1

16	STUD BOLT	35CrMoA		
15	BOLT	45#STEEL		
14	FLAT WASHER	35#STEEL		
13	BOLT	35CrMoA		
12	OIL CUP	BRASS		
10	BEARING GLAND	35#STEEL		
9	STEM NUT	BRASS(ZCuAl10Fe3)		
8	YOKE	WCB		
7	PACKING GLAND	WCB		
6	PACKING	FLEXIBLE GRAPHITE		
5	BONNET	WCB		
4	BONNET GASKET	1Cr13+FLEXIBLE GRAPHITE		
3	STEM	2Cr13		
2	DISC	WCB		
1	BODY	WCB		
NO.	NAME	QTY	MATERIAL	

YUANDA VALVE
CO.,LT

CS GATE VA

Z940H-64-5